

WE ARE TRANSFORMING MOBILITY THANKS TO A BLEND OF TECHNOLOGY AND ART, A COMBINATION OF NEW IDEAS AND UNIQUE DESIGN. WE ARE SHOWING THE WHOLE WORLD THAT FUNCTIONALITY CAN BE FUN AND THAT PRACTICALITY CAN ALSO BE A THING OF BEAUTY. AS YOU FLICK THE IGNITION SWITCH, WE WANT IT TO SET

OFF A REACTION, TRANSFORMING EVERY EXPERIENCE, WHETHER IT BE MONDAY MORNING, THE SCHOOL RUN, HOURS SPENT IN TRAFFIC OR A FRANTIC CALL TO PICK UP BREAD, INTO SOMETHING EXCITING. LET'S ENJOY EVEN THE MOST MUNDANE OF ROUTES AND MAKE OUR JOURNEY THE HIGHLIGHT OF THE DAY.



EICMA 2019 PREVIEW







MP3 500 hpe SPORT ADVANCED

MP3 300 hpe

MP3 300 hpe SPORT

MP3 BUSINESS

500 hpe ABS/ASR

MP3 SPORT

500 hpe ABS/ASR



- HIGHER-PERFORMANCE HPE 500 ENGINE
- WINDSHIELD WITH INTEGRATED HAND GUARDS
- ABS/ASR SYSTEM AND COMBINED BRAKING
- RIDE BY WIRE ELECTRONIC THROTTLE AND DOUBLE STD/ECO MAPPING
- TOM TOM VIO NAVIGATION SYSTEM AS STANDARD

- STORAGE COMPARTMENT WITH USB PORT
- HELMET COMPARTMENT LARGE ENOUGH TO HOLD 2 FULL-FACE HELMETS
- KICKSTANDLESS PARKING SYSTEM
- SADDLE-OPENING REMOTE CONTROL WITH BIKE FINDER
- PIAGGIO MP3 BUSINESS CAN BE RIDDEN WITH A DRIVER'S LICENCE, WITHIN THE LIMITS OF THE LAW



- HIGHER-PERFORMANCE HPE 500 ENGINE
- WINDSHIELD WITH INTEGRATED HAND GUARDS
- REAR GAS SHOCKS BY KAYABA
- ABS/ASR SYSTEM AND COMBINED BRAKING
- RIDE BY WIRE ELECTRONIC THROTTLE AND DOUBLE STD/ECO MAPPING
- STORAGE COMPARTMENT WITH USB PORT
- HELMET COMPARTMENT LARGE ENOUGH TO HOLD 2 FULL-FACE HELMETS

- KICKSTANDLESS PARKING SYSTEM
- SADDLE-OPENING REMOTE CONTROL WITH BIKE FINDER
- FRONT WAVE BRAKE DISCS
- CARBON LOOK FINISH
- RIDER'S FOOTPEG WITH METAL INSERTS
- PIAGGIO MP3 SPORT CAN BE RIDDEN WITH A DRIVER'S LICENCE, WITHIN THE LIMITS OF THE LAW







- 350 ENGINE
- WINDSHIELD WITH INTEGRATED HAND GUARDS
- ABS/ASR SYSTEM AND COMBINED BRAKING
- STORAGE COMPARTMENT WITH USB PORT
- HELMET COMPARTMENT LARGE ENOUGH TO HOLD 2 FULL-FACE HELMETS

- KICKSTANDLESS PARKING SYSTEM
- SADDLE-OPENING REMOTE CONTROL WITH BIKE FINDER
- FRONT WAVE BRAKE DISCS
- MATTE BLACK FINISH
- PIAGGIO MP3 350 CAN BE RIDDEN WITH A DRIVER'S LICENCE, WITHIN THE LIMITS OF THE LAW




MP3 YOURBAN/MP3 YOURBAN SPORT

300 ie






- EXCLUSIVE PATENTED PIAGGIO TECHNOLOGY FOR THE INDEPENDENT, SWIVELLING FRONT WHEELS
- KICKSTANDLESS PARKING SYSTEM
- PIAGGIO MP3 YOURBAN CAN BE RIDDEN, WITHIN THE LEGAL LIMITS, WITH A STANDARD CAR DRIVER'S LICENCE
- COMPACT DIMENSIONS FOR GREATER AGILITY IN THE CITY
- 13" FRONT WHEELS FOR INCREASED GRIP
- COMBINED BRAKING WITH TWO 258 MM FRONT DISCS
- 300 CC, 4-STROKE, 4 VALVE ELECTRONIC INJECTION ENGINE

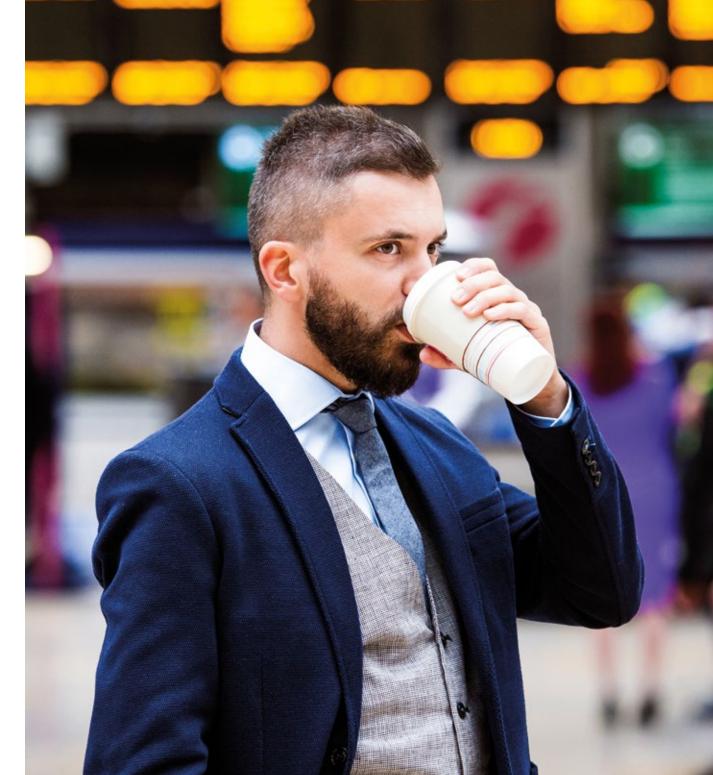



BEVERLY/BEVERLY S

350 ie ABS/ASR - 300 ie ABS/ASR





- ABS/ASR SYSTEM
- SPACIOUS UNDERSEAT STORAGE COMPARTMENT WITH CAPACITY FOR TWO JET HELMETS
- RICH AND PAINSTAKINGLY CRAFTED TRIMS
- REFINED, SPORTY STYLE WITH SMOKED TOP FAIRING (STANDARD ON 350 CC)

- GREAT STABILITY AND RIDING EASE IN TRAFFIC
- USB SOCKET IN THE STORAGE COMPARTMENT
- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS



BEVERLY POLICE

350 ie ABS/ASR - 300 ie ABS/ASR



- ABS/ASR SYSTEM
- BLACK SADDLE WITH DOUBLE STITCHING IN BLUE
- GLOSSY BLACK TRIM, DIAMOND EDGE BLACK WHEEL RIMS (300 CC ONLY)
- REAR VIEW MIRRORS WITH BLUE TINTED GLASS

- EXCLUSIVE MATT COLOUR SCHEME
- SMOKED EFFECT FLYSCREEN (ONLY ON 350)
- USB SOCKET IN THE STORAGE COMPARTMENT
- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS





MEDLEY/MEDLEY S

150 i-get ABS - 125 i-get ABS







MEDLEY S

SPECIAL EDITION



- SPACIOUS UNDERSEAT STORAGE COMPARTMENT WITH CAPACITY FOR TWO FULL FACE HELMETS
- DISTINCTIVE STYLE AND PAINSTAKING ATTENTION TO DETAILS
- USB SOCKET IN THE STORAGE COMPARTMENT

- LIQUID-COOLED I-GET ENGINES WITH START&STOP SYSTEM
- ELECTRONIC DASHBOARD WITH TRIP COMPUTER
- MEDLEY SPECIAL EDITION IN MATT GREY WITH BLUE GRAPHICS AND CARBON LOOK TRIM

LIBERTY/LIBERTY S

150 i-get ABS - 125 i-get ABS - 50 i-get





- DASHBOARD WITH LCD DISPLAY
- ABS SYSTEM ON 125 CC AND 150 CC
- AIR-COOLED I-GET ENGINES EQUIPPED, FOR ALL ENGINE CAPACITIES, WITH ELECTRONIC INJECTION AND 3 VALVES
- LOW SADDLE UNDERSEAT COMPARTMENT WHICH CAN HOLD A JET HELMET WITH VISOR
- FRONT COMPARTMENT FOR STORAGE OF SMALL ITEMS
- LOWER SEAT TO SUIT ALL RIDERS AND FOLD-AWAY PASSENGER FOOTPEGS









- SPORT GRAPHICS AND SADDLE
- METAL RIDER FOOTPEGS
- LARGER FRONT DISC
- SPACIOUS UNDERSEAT COMPARTMENT LARGE ENOUGH TO HOLD A FULL-FACE HELMET
- DASHROARD WITH ANALOGUE LOOKING DIGITAL DISPLAY
- EURO 4







- DASHBOARD WITH ANALOGUE AND DIGITAL INSTRUMENTATION
- USB PORT IN THE STORAGE COMPARTMENT
- COMPACT DIMENSIONS AND FLAT FOOTBOARD
- SPACIOUS UNDERSEAT COMPARTMENT, LARGE ENOUGH TO HOLD A FULL-FACE HELMET
- WIDE TYRES





- 50 CC I-GET 4-STROKE 3 VALVE ELECTRONIC INJECTION ENGINE

- MAXIMUM RESPECT FOR THE ENVIRONMENT AND LOW FUEL CONSUMPTION

MP3

- 50 litre top box
- 37 litre top box
- Quick-release thermo-formed top-box
- Thermo-formed, quick-release suitcases
- Tunnel bag
- Style windshield
- Comfort+ leg cover
- Leg cover
- Leg cover heating kit
- Heated hand grips
- Hand warmers
- Electronic anti-theft device
- Saddle-handlebar top mechanical anti-theft device
- Outdoor vehicle protection cover
- Piaggio Multimedia Platform 2.0
- Multimedia and GPS support
- Smartphone support
- Comfort+ saddle
- Comfort gel saddle
- Special Sport shock absorbers
- Carbonskin helmet with visor and retractable sun visor
- Modular helmet with visor and retractable sun visor

NRG POWER

- Windscreen
- Top box (can hold one full-face helmet or one flip-up helmet)
- Top box mounting kit
- Saddle-handlebar anti-theft system

TYPHOON

- Windscreen
- Saddle-handlebar anti-theft system

LIBERTY

- Windshield
- Transparent or smoked top fairing
- Top box (can hold a full-face helmet or two P-Style Jet helmets)
- Top box backrest to match the saddle
- Top box bracket kit
- Leg cover
- Outdoor vehicle cover
- Electronic alarm
- PMP Piaggio Multimedia Platform
- Bike finder
- USB port kit
- Side stand
- Rubber mat
- P-Style helmet to match the vehicle
 Rubber mat

ZIP

- Windshield
- Smoked effect flyscreen
- Saddle-handlebar anti-theft system

FOR ALL VEHICLES

TomTom VIO GPS navigation system Piaggio Group special edition

MEDLEY

- Style and Urban windshield
- Transparent or smoked top fairing
- Large top box kit (can hold two full-face helmets)
- Medium top box (can hold a full-face helmet or two P-Style Jet helmets)
- Top box bracket kit
- Backrest for top box colour coded to match the saddle
- Outdoor vehicle cover
- Saddle-handlebar anti-theft system
- Electronic alarm
- Multimedia and GPS bracket kit
- PMP Piaggio Multimedia Platform
- Side stand
- P-Style helmet colour code to match the vehicle

BEVERLY

- Windscreen
- Transparent or smoked
- 37 litre top box
- 36 litre top box
- Leg cover
- Outdoor vehicle cover
- Indoor vehicle cover
- Electronic alarm
- Saddle-handlebar anti-theft system
- Multimedia and GPS bracket
- Carbonskin helmet with visor and retractable sun visor





	MP3 Business / Sport	МРЗ	
	500 hpe	350 ie	
Engine	Single cylinder hpe, 4-stroke	Single cylinder, 4-stroke	
Engine capacity	493 cc	330 cc	
Bore x Stroke	94 mm x 71 mm	78 mm x 69 mm	
Power	32.5 kW (44.2 HP) a 7,750 rpm	22.5 kW (30.6 HP) a 8,500 rpm	
Torque	47,5 Nm a 5.500 rpm	29 Nm a 6.250 rpm	
Consumption (WMTC)	25 km/l	25.6 km/l	
CO ₂ Emissions	92 g/km	91 g/km	
Distribution	4-valve single overhead camshaft (SOHC)	4-valve single overhead camshaft (SOHC)	
Fuel system	Ride by wire, double mapping (ECO and STD)	Electronic injection	
Cooling	Liquid	Liquid	
Lubrication	Wet sump	Dry sump	
Starter	Electric	Electric	
Gearbox	CVT with torque server	CVT with torque server	
Clutch	Automatic, centrifugal dry clutch	Oil bath centrifugal multi-disk	
Frame	Double cradle in high strength tubular steel	Double cradle in high strength tubular steel	
Front suspension	Articulated quadrilateral. Hydraulic suspension locking system, stroke 85 mm	Articulated quadrilateral. Hydraulic suspension locking system, stroke 85 mm	
Rear suspension	Double shock absorber, 4 preload position adjustment (two gas shock absorbers with continuous adjustable preload on Sport version), stroke 108 mm	Double action hydraulic shock absorber with adjustable spring preload to 4 positions, stroke 102 mm	
Front brake	Double disc Ø 258 mm	Double disc Ø 258 mm	
Rear brake	Ø 240 mm disc	Ø 240 mm disc	
Front tyre	Tubeless 110/70 - 13"	Tubeless 110/70 - 13"	
Rear tyre	Tubeless 140/70 - 14"	Tubeless 140/70 - 14"	
Braking system	ABS with braking integrated with the pedal, ASR	ABS with braking integrated with the pedal, ASR	
Length/Width/ Wheelbase	2,200 mm / 800 mm / 1,540 mm	2,200 mm / 800 mm / 1,545 mm	
Seat height	790 mm	790 mm	
Fuel tank capacity	12 litres	12 litres	
Emissions compliance	EURO 4	EURO 4	

^{*} MP3 can also be ridden with a car driver's licence, in accordance with European directive 2006/126/CE, as long as the rider is at least 21 years of age, is riding in his/her home country and respects any additional national legislation. Ask your local dealer about the specific requirements in your country.

	MP3 Yourban / MP3 Yourban Sport
	300 ie
Engine	Single cylinder, 4-stroke, 4 valves
Engine capacity	278 cc
Bore x Stroke	75 mm x 63 mm
Power	15.5 kW -21.1 HP- at 7,250 rpm
Torque	22.5 Nm at 6,000 rpm
Consumption (WMTC)	30.3 km/l (WMTC cycle)
CO ₂ Emissions	76 g/km
Distribution	4-valve single overhead camshaft (SOHC)
Fuel system	Electronic injection
Cooling	Liquid
Lubrication	Wet sump
Starter	Electric
Gearbox	CVT continuously variable transmission with torque server
Clutch	Automatic centrifugal dry clutch
Frame	Double cradle in high resistance tubular steel
Front suspension	Articulated quadrilateral. Hydraulic suspension locking system
Rear suspension	Dual hydraulic shock absorbers adjustable in preload
Front brake	Two 258 mm discs Ø with hydraulic control
Rear brake	Two 240 mm discs Ø with hydraulic control
Braking system	Combined braking
Front tyre	Tubeless 110/70 - 13"
Rear tyre	Tubeless 140/60 - 14"
Length/ Width/Wheelbase	2,040 mm / 760 mm / 1.440 mm
Seat height	780 mm
Fuel tank capacity	11 litres
Emissions compliance	EURO 4

^{*} MP3 can also be ridden with a car driver's licence, in accordance with European directive 2006/126/CE, as long as the rider is at least 21 years of age, is riding in his/her home country and respects any additional national legislation. Ask your local dealer about the specific requirements in your country.

	BEVERLY / BEVERLY S / BEVERLY Police	
	300 ie	350 ie
Engine	Single cylinder 4-stroke	Single cylinder 4-stroke
Engine capacity	278 cc	330 сс
Bore x Stroke	75 mm x 63 mm	78 mm x 69 mm
Power	15.5 kW -21 HP- at 7,250 rpm	22.2 kW -30.2 HP- at 8,250 rpm
Torque	22.5 Nm at 5,750 rpm	29 Nm at 6,250 rpm
Fuel system	Electronic injection	Electronic injection
Consumption (WMTC)	30.3 Km/l	27.8 Km/l
CO ₂ Emissions	78 g/Km	85 g/Km
Distribution	4-valve single overhead camshaft (SOHC)	4-valve single overhead camshaft (SOHC)
Cooling	Liquid	Liquid
Lubrication	Wet sump	Dry sump
Starter	Electric	Electric
Gearbox	CVT continuously variable transmission	CVT continuously variable transmission
Clutch	Automatic centrifugal dry clutch	Oil bath automatic centrifugal multi-disk
Frame	Double cradle in high strength tubular steel	Double cradle in high strength tubular steel
Front suspension	Hydraulic telescopic fork	Hydraulic telescopic fork
Rear suspension	Dual hydraulic shock absorbers adjustable in preload	Dual hydraulic shock absorbers adjustable in preload
Front brake	300 mm Ø disc with hydraulic control	300 mm Ø disc with hydraulic control
Rear brake	240 mm Ø disc with hydraulic control	240 mm Ø disc with hydraulic control
Braking system	ABS/ASR	ABS/ASR
Front tyre	Tubeless 110/70 - 16"	Tubeless 110/70 - 16"
Rear tyre	Tubeless 140/70 - 14"	Tubeless 150/70 - 14"
Length / Width / Wheelbase	2,190 mm / 780 mm / 1,535 mm	2,190 mm / 780 mm / 1,560 mm
Saddle height	790 mm	790 mm
Fuel tank capacity	12.5 litres	12.5 litres
Emissions compliance	EURO 4	EURO 4

	MEDLEY / MEDLEY S / SPECIAL EDITION		
	150 i-get	125 i-get	
Engine	Single cylinder i-get 4 stroke	Single cylinder i-get 4 stroke	
Engine capacity	155 cc	125 cc	
Bore x Stroke	58 mm x 58.7 mm	52 mm x 58.7 mm	
Max. Power	11 kW at 7,750 rpm	9 kW at 8,250 rpm	
Max. Torque	14,4 Nm at 6,400 rpm	12 Nm at 6,500 rpm	
Consumption (WMTC)	43.1 km/l	45 km/l	
CO ₂ Emissions	57 g/km	55 g/km	
Distribution	4-valve single overhead camshaft (SOHC)	4-valve single overhead camshaft (SOHC)	
Cooling	Liquid	Liquid	
Lubrication	Wet sump	Wet sump	
Starter	Start & Stop system	Start & Stop system	
Fuel system	Electronic injection	Electronic injection	
Gearbox	Automatic CVT	Automatic CVT	
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch	
Frame	Single cradle tubular steel structure with pressed steel reinforcements	Single cradle tubular steel structure with pressed steel reinforcements	
Front suspension	Telescopic hydraulic fork, 88 mm stroke	Telescopic hydraulic fork, 88 mm stroke	
Rear wheel	Hydraulic dual action shock absorber, 5-position spring preload adjustment, 76 mm stroke	Hydraulic dual action shock absorber, 5-position spring preload adjustment, 76 mm stroke	
Braking system	Two-channel ABS	Two-channel ABS	
Front tyre	Tubeless 100 / 80 – 16"	Tubeless 100 / 80 – 16"	
Rear tyre	Tubeless 110 / 80 - 14"	Tubeless 110 / 80 - 14"	
Front brake	Ø 260 mm disc, with 2x Ø 25.4 mm dual piston floating calliper	Ø 260 mm disc, with 2x Ø 25.4 mm dual piston floating calliper	
Rear brake	Ø 240 mm disc, with 2x Ø 22 mm dual piston floating calliper	Ø 240 mm disc, with 2x Ø 22 mm dual piston floating calliper	
ABS	As standard	As standard	
Length / Width / Wheelbase	2,020 mm/705 mm/1,390 mm	2,020 mm/705 mm/1,390 mm	
Saddle height	799 mm	799 mm	
Fuel tank capacity	7 litres	7 litres	
Emissions compliance	EURO 4	EURO 4	

	LIBERTY / LIBERTY S		
	150 i-get	125 i-get	50 i-get
Engine	Single cylinder 4-stroke i-get	single cylinder 4-stroke i-get	single cylinder 4-stroke i-get
Engine capacity	155 cc	124 cc	49.9 cc
Bore x Stroke	58 mm x 58.6 mm	52 mm x 58.6 mm	39 mm x 41.8 mm
Max Power	9.6 kW at 7,750 rpm	8 kW at 7,500 rpm	2.4 kW at 7,500 rpm
Max Torque	13 Nm at 5,250 rpm	11 Nm at 6,000 rpm	3.1 Nm at 7,250 rpm
Consumption (WMTC)	36.8 Km/l	40 Km/l	35.71 km/l
CO ₂ Emissions	65 g/Km	61 g/Km	62 g/km
Distribution	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)
Cooling	Air	Air	Air
Lubrication	Oil with wet sump	Oil with wet sump	Oil with wet sump
Fuel system	Electronic injection	Electronic injection	Electronic injection
Starter	Electric	Electric	Electric
Gearbox	Automatic CVT	Automatic CVT	Automatic CVT
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	High resistance tubular steel	High resistance tubular steel	High resistance tubular steel
Front suspension	Telescopic hydraulic fork, 76 mm stroke	Telescopic hydraulic fork, 76 mm stroke	Telescopic hydraulic fork, 76 mm stroke
Rear suspension	Single hydraulic shock absorber with 5-position preload adjustment, 74.5 mm stroke	Single hydraulic shock absorber with 5-position preload adjustment, 74.5 mm stroke	Single hydraulic shock absorber, 73.5 mm stroke
Front tyre	Tubeless 90 / 80 - 16", 51J	Tubeless 90 / 80 - 16", 51J	Tubeless 90 / 80 - 16", 51J
Rear tyre	Tubeless 100 / 80 - 14", 54J	Tubeless 100 / 80 - 14", 54J	Tubeless 100 / 80 - 14", 54J
Front brake	Single Ø 240 mm disc	Single Ø 240 mm disc	Single Ø 240 mm disc
Rear brake	Ø 140 mm drum	Ø 140 mm drum	Ø 140 mm drum
ABS	As standard	As standard	-
Length/ Width/Wheelbase	1,945 mm / 690 mm / 1,340 mm	1,945 mm / 690 mm / 1,340 mm	1,945 mm / 690 mm / 1,370 mm
Seat height	< 790 mm	< 790 mm	780 mm
Fuel tank capacity	6 litres	6 litres	6 litres
Emissions compliance	EURO 4	EURO 4	EURO 4

	NRG	TYPHOON	ZIP / ZIP S
	50 2S	50 2S	50 i-get
Engine	Single cylinder, 2-stroke	Single cylinder, 2-stroke	Single cylinder 4-stroke i-get
Engine capacity	49 cc	49 cc	50 cc
Bore per stroke	40 mm x 39.3 mm	40 mm x 39.3 mm	39 mm x 41.8 mm
Max. power	3 kW (4.08 HP) at 7,000 rpm	2.2 kW (3 HP) at 7,000 rpm	2.3 kW (3.12 HP) at 7,250 rpm
Max. torque	4 Nm at 6,500 rpm	3 Nm at 6,500 rpm	3.1 Nm at 6,750 rpm
Consumption (WMTC)	29.85 km/l	26.3 km/l	35.71 km/l (WMTC cycle)
CO ₂ Emissions	76 g/km	85 g/km	63 g/km
Distribution	-	-	Single overhead camshaft, 3 valves
Cooling	Liquid	Air	Air
Lubrication	Automatic mixer	Automatic mixer	Oil with wet sump
Fuel system	Electronic carburettor	Electronic carburettor	Electric
Starter	Electric starter and kick starter	Electric starter and kick starter	Electronic injection
Gearbox	Automatic CVT	Automatic CVT	Automatic CVT
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	Single cradle structure in high resistance tubular steel	Single cradle structure in high resistance tubular steel	Single cradle structure in high resistance tubular steel
Front suspension	Hydraulic telescopic fork	Hydraulic telescopic fork	Hydraulic telescopic fork
Rear suspension	Single hydraulic shock absorber	Single hydraulic shock absorber	Single hydraulic shock absorber
Front tyre	120/70 - 13"	120/80 - 12"	100/80 - 10"
Rear tyre	130/60 - 13"	130/80 - 12"	120/70 - 10"
Front brake	240 mm Ø disc	220 mm Ø disc	175 mm Ø disc
Rear brake	175 mm Ø disc	140 mm Ø drum	110 mm Ø drum
Length / Width / Wheelbase	1,800 mm / 730 mm / 1,275 mm	1,945 mm / 690 mm / 1,360 mm	1,700 mm / 680 mm / 1,230 mm
Seat Height	810 mm	789 mm	Adjustable: 750 mm - 765 mm - 780 mm
Fuel tank capacity	6.5 litres	6.5 litres	6.6 litres
Emissions compliance	Euro 4	Euro 4	Euro 4



The company reserves the right to make technical and aesthetic changes at any time. Ride carefully, always wearing a helmet and suitable gear. Always comply with the rules of the road and respect the environment. Read the operating and maintenance manual carefully. Always ask for original and approved spare parts in accordance with prevailing standards. See your Official Piaggio Dealership and Authorised Retailers for a secure purchase and guaranteed service support. Original Piaggio spare parts are a guarantee of quality and ensure that vehicle performance remains unaltered.

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
=ISO 9001=

COMPANY WITH
SAFETY SYSTEM
CERTIFIED BY DNV
=ISO 14001=

COMPANY WITH
SAFETY SYSTEM
CERTIFIED BY DNV
CERTIFIED BY DNV
= ISO 14001=

COMPANY WITH
SAFETY SYSTEM
CERTIFIED BY DNV

Piaggio is a registered trademark of Piaggio & C. S.p.A.

DEALERSHIP STAMP

